

Order Parts By Description.

SETTING UP INSTRUCTIONS

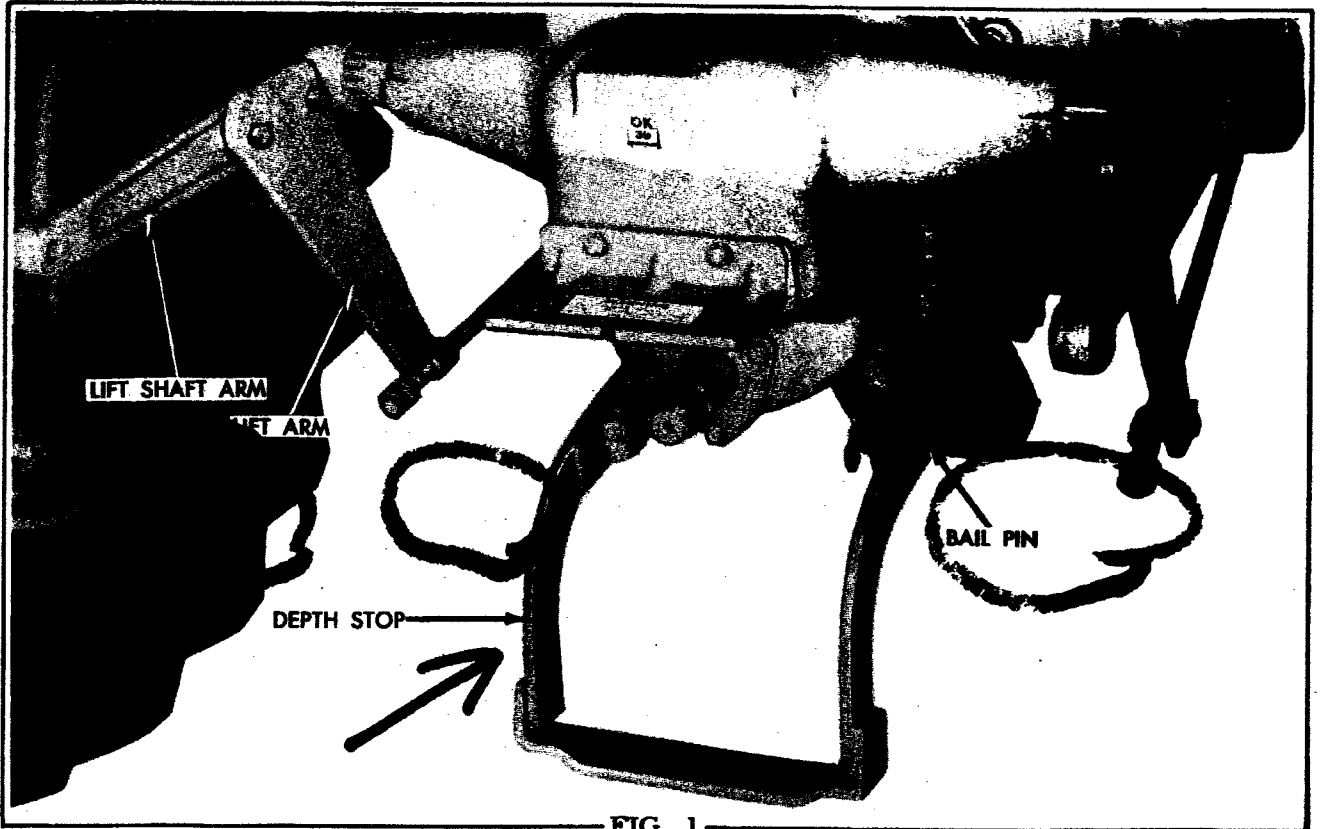


FIG. 1

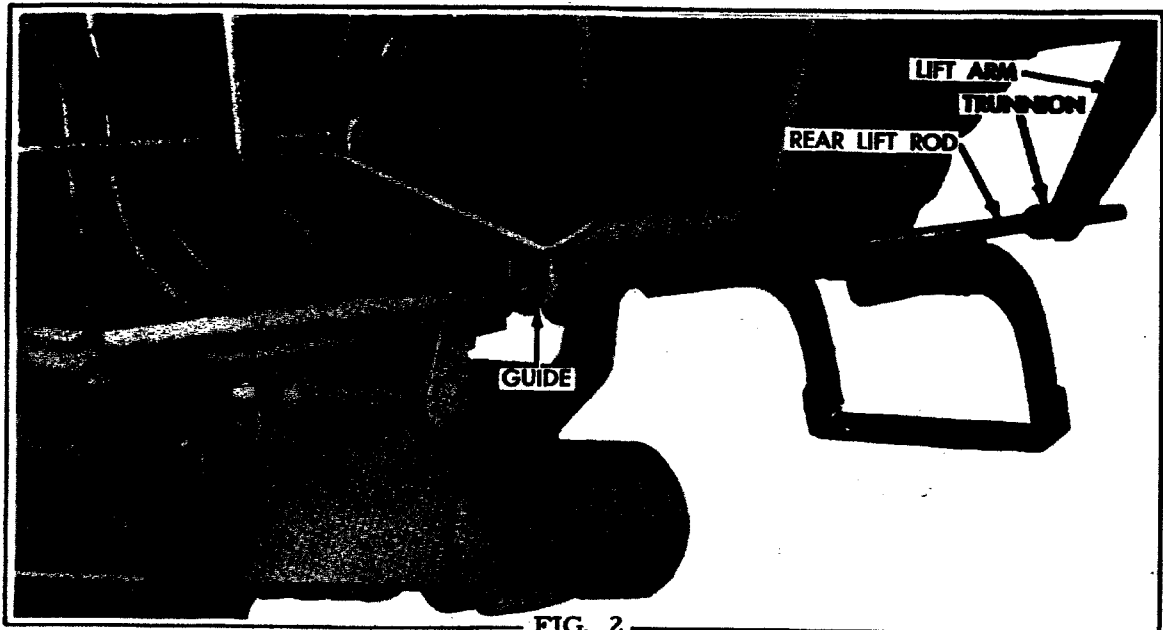


FIG. 2

DEPTH STOP (Refer to Fig. 1)

Attach depth stop to tractor using the regular drawbar bail pins.

LINKAGE (Refer to Fig. 1 and 2)

Attach lift arms to tractor lift shaft so bosses

are in contact with inner side of tractor lift shaft arms.

Attach guides to under side of tractor platform, then insert rear lift rods through guides. Pin trunnions to lift arms, then insert lift rods into trunnions and replace nuts. Turn nuts onto lift rods approximately 1" as a starting point. Position of nuts control lifting height of cultivator.